





NOTE: For use in applications with greater than 5 mg/l but less than 400 mg/l total dissolved solids in water and less than 200 mg/l hardness (either naturally occurring or treated with reverse osmosis or other TDS reducing technology).

Not recommended for use with softened water.

230 V 50 Hz – ice and water dispensers				
lce storage capacity	Configuration	Filter*	Item number	
6.8 kg (15 lb)	countertop ice and water	no filter	E15CI100A-IW-NF-ST-00	
		internal	E15CI100A-IW-CF-ST-00**	
	freestanding ice and water	no filter	E15FS100A-IW-NF-ST-00	
		internal	E15FS100A-IW-CF-ST-00	
	countertop ice-only	no filter	E15CI100A-NW-NF-ST-00**	
		internal	E15CI100A-NW-CF-ST-00	
	freestanding ice-only	no filter	E15FS100A-NW-NF-ST-00	
		internal	E15FS100A-NW-CF-ST-00	

* Internal filter is a 5 micron particle and carbon filter. **All units are available FCA, Easton, PA USA (incoterms 2010). Only models E15CI100A-IW-CF-ST-00 and E15CI100A-NW-NF-ST-00 are available from FCA Wislina, Poland (incoterms 2010).

$E15 \; Series \text{ ice and water dispenser with Chewblet}^{\circ} \; \text{ice machine}$

countertop and freestanding

Features

Compact footprint, only 37.1 cm (14.62") W x 59.7 cm (23.50") D 6.8 kg (15 lb) ice storage capacity

Integral air-cooled ice machine with up to 54.4 kg (120 lb) daily production of popular Chewblet ice

- designed to make up to 400 servings per day¹
- soft, chewable, compressed nugget ice is preferred over cubes²
- environmentally responsible R134a refrigerant with zero ozone depletion potential
- energy saving sleep mode
- quiet production without noisy harvest cycles

Durable, attractive dispenser

- modern styling, stainless steel exterior with accent trim
- dispense-activated soft blue light illuminates point-of-use
- easy-to-clean, removable 591 ml (20 oz) drip tray
- dispenser top can support 15.9 kg (35 lb)

Designed with sanitation in mind

- Agion $^{\mbox{\scriptsize \$}}$ silver-based antimicrobial product protection of key ice and water contact components $^{\mbox{\scriptsize \$}}$
- capacitive touch dispensing eliminates direct user contact with ice
- accommodates cups up to 22.4 cm (8.80") tall

Installation

- two easy connections electric and water
- drainless design allows dispenser to be placed anywhere a water line can be run and eliminates the cost of a drain installation

Warranty

- 2 years parts, 5 years compressor parts

Accessories

Base stand for converting countertop models (item# 00956292) 10.16 cm (4.00") leg kit for CI - countertop models (item# 00956300) 15.24 cm (6.00") leg kit for FS - freestanding models (item# 00956318) Drip tray drain kit for countertop models (includes 10.16 cm (4.00") legs) (item# 00981977)

Drip tray drain kit for freestanding models (item# 00956375)

SafeCLEAN Plus™ 15 series single use kit (item# 01054691)

SafeCLEAN Plus case of 24 packs (item# 01050863)

- Nu-Calgon[®] IMS–II sanitizer, 16 oz bottle (item# 00979674)
- Cartridge, replacement 5 micron particle/carbon (item# 00968107)

Claris[®] hardness removal filtration system (item# 00986059)

Follett Europe Polska Sp. z o.o. Mokry Dwór 26C 83-021 Wiślina, Poland Phone: +48 (58) 785-6140 | Fax: +48 (58) 785-6159 folletteurope.com

801 Church Lane | Easton, PA 18040, USA 1.610.252.7301 | Fax: +1.610.250.0696 | follettice.com




Specification

specification		
Ice storage capacity	6.8 kg (15 lb)	
W1 Width	37.1 cm (14.62")	
D1 Depth of bottom	56.2 cm (22.12")	
D2 Depth of top	59.7 cm (23.50")	
H1 Height – countertop models	57.2 cm (22.50")	
H2 Height – freestanding models	119.4 cm (47.00")	
H3 Height, base stand	62.2 cm (24.50")	
H4 Dispense height clearance	22.40 cm (8.80")	
Ventilation clearance	7.62 cm (3.00") on each side	
Service clearance	7.62 cm (3.00") behind and on each side	
C1 230 V/50/1 electrical	5 amps. Connect to dedicated 10 amp circuit, fuse or breaker. Dispenser has IEC 60320-C13 connector in rear of dispenser for use with appropriate modular cord.	
C2 Water inlet	1/4" MPT	
Air temperature	10 - 38 C (50 -100 F)	
Water temperature	4 - 32 C (40 - 90 F)	
Water pressure	69 - 482 kpa (10 - 70 psi)	
lce production at 21 C (70 F) air and 10 C (50 F) water	54.4 kg (120 lb) /day	
lce production at 32 C (90 F) air and 21 C (70 F) water	40.8 kg (90 lb) /day	
Energy consumption 32 C (90 F) air and 21 C (70 F) water	7.1 kWh per 45.4 kg (100 lb) ice	
Heat rejection	1700 BTU/hr	
Water consumption	45.4 L (12 gal) of potable water per 45.4 kg (100 lb) of ice	
Approximate shipping weight – countertop models	46 kg (100 lb)	
Approximate shipping weight – freestanding models	59 kg (130 lb)	
NOTE For independent of Design	al familia and a station of Early and the station	

NOTE: For indoor use only. Designed for commercial use. Follett is not able to provide in-house services for residential installations.

SHORT FORM SPECIFICATION: (Choose one) _____ Ice and water or _____ ice-only dispenser to be Follett® automatic load in (choose one) _____ countertop or _____ freestanding configuration, with 6.8 kg (15 lb) of storage. Environmentally responsible R134a ice machine to be air-cooled. Ice machine to produce approximately 54.4 kg (120 lb) of Chewblet compressed nugget ice at air temperature of 21 C (70 F) and water temperature of 10 C (50 F). Ice machine to be equipped with printed circuit board and diagnostics to allow simplified servicing and with capacitive touch user interface. Storage area to be insulated with non-CFC, high density foam-in-place polyurethane. 230 V/50/1. Dispenser has IEC 60320-C13 connector in rear of dispenser for use with appropriate modular cord. CE listed. For use in applications with greater than 5 mg/l but less than 400 mg/l total dissolved solids in water and less than 200 mg/l hardness (either naturally occurring or treated with reverse osmosis or other TDS reducing technology).

Dimensional drawing

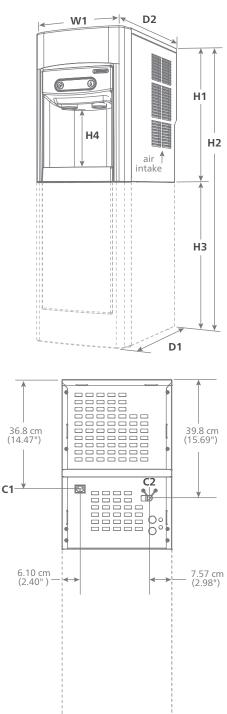

1 355 ml (12 oz) cups, 1/3 full of ice.

Independent third party studies. Contact Follett for details.

3 Disclaimer: Antimicrobial protection is limited to the treated components and does not treat water or ice.

Calgon is a licensed tradename distributed by Nu-Calgon, in the United States.

Claris is a registered trademark of the Aquis GmbH in Switzerland.

Agion is a registered trademark of Sciessent LLC.

SafeCLEAN Plus is a trademark of the Follett Corporation.

Chewblet and Follett are registered trademarks of Follett Corporation, registered in the US.

Follett reserves the right to change specifications at any time without obligation. Certifications may vary depending on country of origin.

Follett Europe Polska Sp. z o.o. Mokry Dwór 26C 83-021 Wiślina, Poland Phone: +48 (58) 785-6140 | Fax: +48 (58) 785-6159 folletteurope.com



E15 Series countertop and freestanding



801 Church Lane | Easton, PA 18040, USA 1.610.252.7301 | Fax: +1.610.250.0696 | follettice.com