


EREF4-ADA – Freestanding or below 864 mm ADA-compatible counters, 113 L capacity for 230 V, 50 Hz applications

List Price: €2665, FOT Gdansk

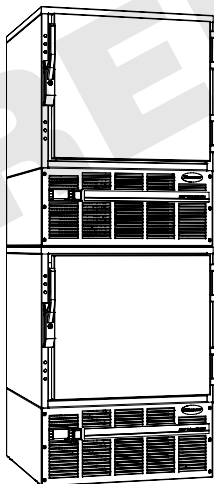

(2) units shown with stacking kit accessory (item# 00926618)

Medical-grade undercounter refrigerator with external digital temperature display in °C or °F. Provides secure, stable temperature storage required for patient floor, lab and pharmacy applications. Stainless steel interior/exterior.

Consistent temperature performance

- Heavy-duty 1/4 hp (186.5 Watts) compressor, forced air cooling and digital microprocessor controller maintain uniform cabinet temperatures with quick pull-down and rapid recovery following door openings
- Adjustable set point meets temperature needs for different applications
- Locking door handle provides medication security
- Supports U.S.A. Joint Commission standards for medication storage

More features designed specifically for healthcare

- Easy-to-read external temperature display in °C or °F allows easy logging without opening door
- Positive locking door latch and magnetic gasket provide secure closure
- Two, easy-to-clean, epoxy-coated shelves
- Rear port for easy alarm probe (accessory) entry

Easy installation, cleaning and care

- Front-breathing design requires no side, top or back clearance
- 603 mm width allows easy installation in standard 610 mm casework openings
- Field-reversible door provides left or right opening flexibility
- Automatic, off-cycle defrost eliminates manual defrosting
- Condensation evaporates automatically
- Durable stainless steel interior and exterior for easy cleaning


Options/accessories

- Keypad, code-based entry
- Additional shelf (item# 00131748)
- Temperature alarm module with °C or °F display (item# 00112185)
- Temperature surveillance module (includes alarm, digital display and chart recorder) (item# 00168674)
- Omnicell®-compatible door bracket (item# 00158014)
- Pyxis®-compatible door bracket (item# 00114702)
- Stacking kit (item# 00926618)
- 432 mm stainless pedestal stand (item# 00931154)

JOB: _____

ITEM: _____

*Pyxis® is a registered trademark of Cardinal Health in the United States and other countries.
*Omniceil® is a registered trademark of Omnicell, Inc. in the United States.

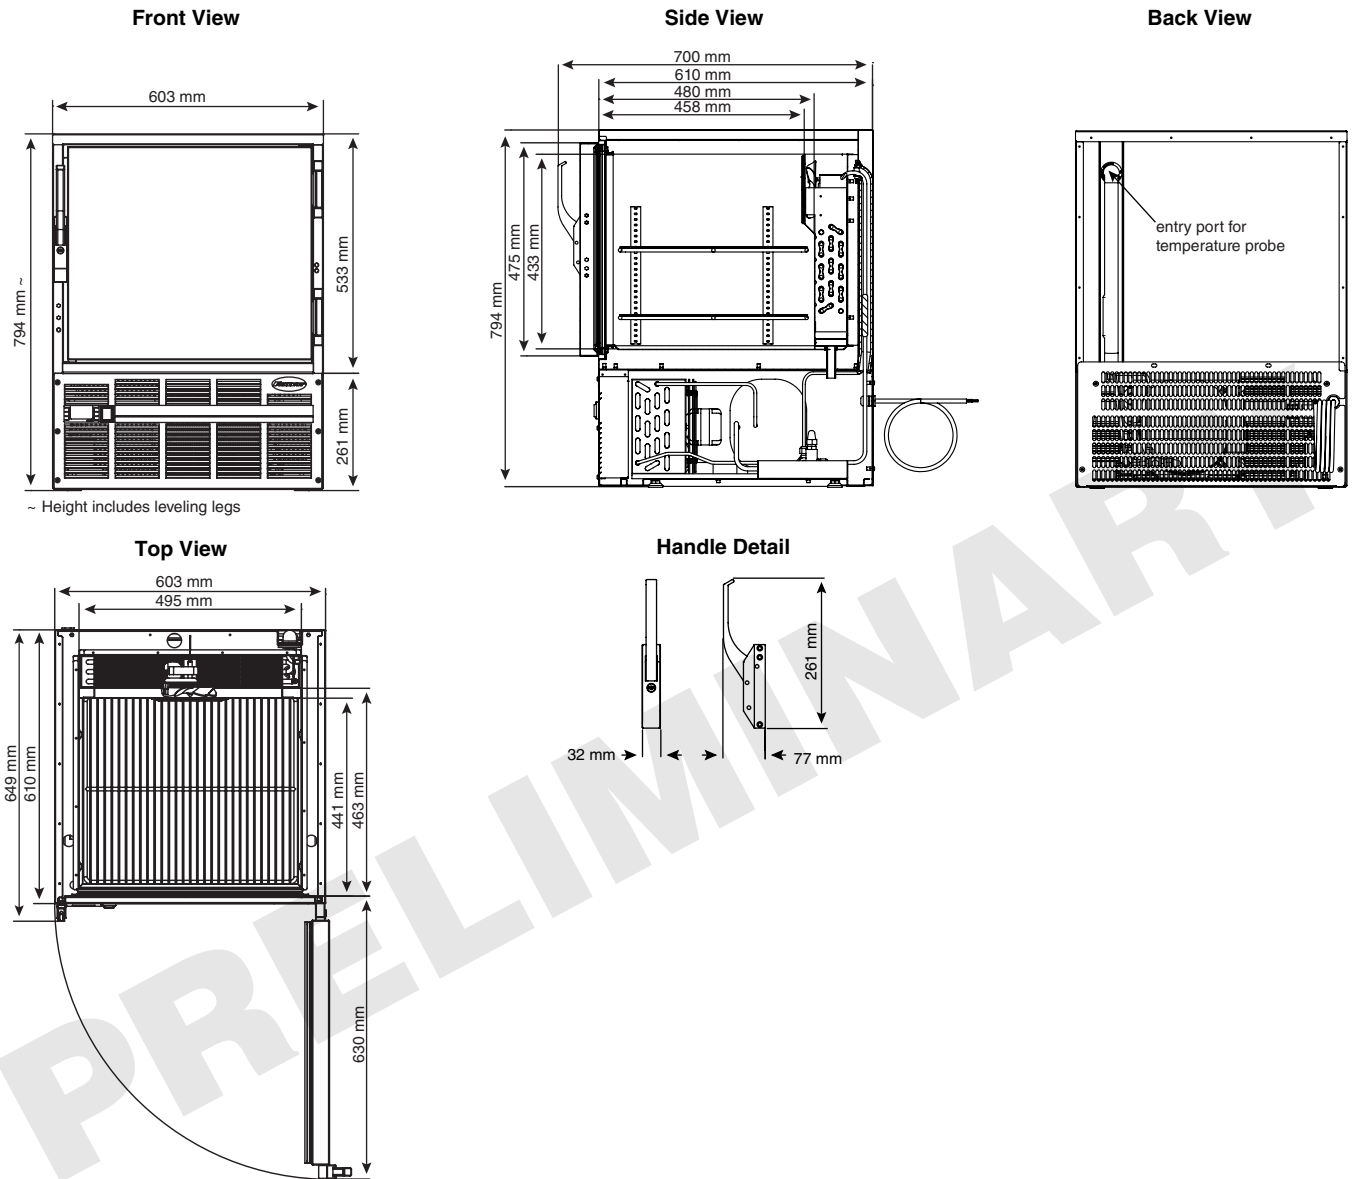

Refrigerant R404A, 260 g

Max. heat rejection 409 W (409 Joules per second)

Electrical

230 V, 50 Hz, 1 ph, 4 amps, max. fuse 16 amps.

Approximate shipping weight 86 kg

Warranty

- 2 year parts and labor on entire refrigerator
- 5 year parts on compressor

Specifications Undercounter refrigerator to be Follett® model EREF4, 794 mm high with 113 L capacity. Environmentally responsible R404A refrigeration system to include heavy-duty 1/4 HP compressor, blower, blower coil and automatic evaporative forced air cooling with off-cycle defrost. Refrigerator to be equipped with external temperature display (displays in °C or °F) and solid-state controller to maintain uniform cabinet temperatures. Controller to have adjustable set point to meet varied temperature needs for different applications. Refrigerator door to be field-reversible and equipped with replaceable dart-style gasket and chrome-plated handle with cylinder lock. Refrigerator interior and exterior to be stainless steel. Two epoxy-coated wire shelves adjust in 13 mm increments. Storage area to be insulated with high-density, non-CFC foam polyurethane.

Follett is a registered trademark of Follett Corporation, registered in the US. Follett reserves the right to change specifications at any time without obligation. Certifications may vary depending on country of origin.