



CIM0325HA90

MODEL **CIM0325HA90**

Half Cube

A slimline, modular cube ice maker from Ice-O-Matic's Elevation Series — easy to clean, simple to service and environmentally responsible without sacrificing output. It produces up to **136 kg** of half-size cubes per 24 hours and sits neatly atop a separate storage bin, making it ideal for growing cafés, bars, restaurants and venues.

up to
136 kg
ICE / 24
HOURS

565 mm
CABINET
WIDTH

R290
REFRIGERANT



CIM0325HA90 — storage bin sold separately

FEATURES AND BENEFITS

Natural R290 Refrigerant

Runs on environmentally friendly R290 for efficient, low-impact cooling.

Flexible Modular Design

Dual exhaust for flexible application and easy installation on bins/dispensers.

Fast, Hygienic Cleaning

Easy to clean with front facing evaporator and dishwasher safe (up to 82°C) components. Reduces operating costs.

Harvest Assist

Provides consistent ice production for the life of the ice maker while reducing energy consumption and increasing capacity.

Common-Part Servicing

Shares parts across the entire CIM range, simplifying service and spares holding.

Corrosion-Resistant Build

Durable, electroless nickel plating on all evaporator plates and fingerprint-proof aluminium ensures reliability.

QUICK FACTS

Model	CIM0325HA90
Ice form	Half Cube · 10 x 22 x 22mm
Ice Production @ 21°C Air / 10°C Water	136 kg / 24 h
Ice Production @ 32°C Air / 21°C Water	100 kg / 24 h
Dimensions	W565mm × D616mm × H540mm

OPTIONS & ACCESSORIES



B42 storage bin

160 kg capacity — direct fit, no kit

ICB110SC storage bin

110 kg capacity — direct fit, no kit

CD20B Water Filter System / CD200B Replacement


Water filtration system

Adapter kits combine the CIM0325 with wider bins. Bins & kits sold separately.

WARRANTY 3 years parts & labour (ice maker) · 5 years parts (evaporator & compressor).

DIMENSIONS & TECHNICAL DRAWINGS

Air-cooled configuration shown. Dimensions in mm.

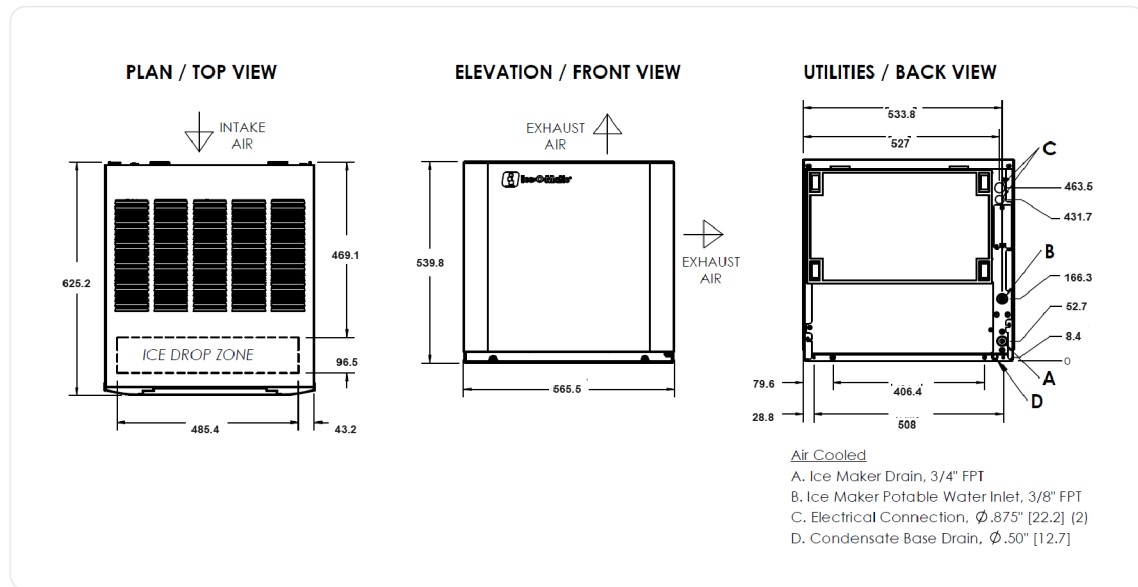

SPECIFICATIONS

Model	CIM0325HA90	Watts Used Per Hr @ 32°C Air / 21°C Water	559
Condensing type	Air	Approx. BTU per hour	5,945
Voltage / Hertz / Phase	220–240 / 50 / 1	Number of wires	3 (incl. ground)
Min. Circuit Ampacity	5.6 A	Refrigerant	R290A
Max. Breaker Size	10 A	Refrigerant charge	130 g
kWH per 45 kg ice @ 21°C Air / 10°C Water	4.05		
kWH per 45 kg ice @ 32°C Air / 21°C Water	6.04		

OPERATING REQUIREMENTS

Ambient temp. range (Air)	10–43°C
Water temp.	4–43°C
Water pressure	1.4–5.5 bar

DIMENSIONS & SHIPPING

Unit dimensions (W×D×H)	565mm × 616mm × 540mm
Shipping dims (W×D×H)	635mm × 686mm × 686mm
Shipping weight	59 kg

WATER USAGE

Litres per 45 kg of ice @ 32°C Air / 21°C Water	
Potable	20

BIN CHART *Kits for combining wider bins with smaller models*

ICE STORAGE BINS											
KITS	Model No.	B25	B40	ICB110SC	B42	B55	ICB180SC	ICB230SC	ICB242	ICB460	B110
	Capacity	110 kg	156 kg	110 kg	160 kg	232 kg	180 kg	232 kg	242 kg	460 kg	388 kg
	Width	762 mm	762 mm	563 mm	559 mm	762 mm	760 mm	764 mm	1,230 mm	1,226 mm	1,219 mm
	CIM0325	BT55		Kit Not Required		BT55			BT Included	BT100	

ICB110SC (default pairing) requires no kit. "NA" denotes bins not combinable with the CIM0325. Bins and kits sold separately.