



# Champion™ 15 ice and water dispenser

## Chewblet® ice machine

### Features

Compact footprint, only 37.1 cm W x 56.8 cm D

6.8 kg ice storage capacity

Integral air-cooled ice machine with up to 45.4 kg daily

production of popular Chewblet ice

Drained option available

Freestanding option available

- serves up to 75 people in 9 hours <sup>1</sup>
- soft, chewable, compressed nugget ice is preferred over cubes <sup>2</sup>
- environmentally responsible refrigerant, R290 with zero ozone depletion potential and low GWP
- energy saving sleep mode
- quiet production without noisy harvest cycles

Durable, attractive dispenser

- modern styling with updated look
- 4.3" LCD capacitive touch display
- easy-to-clean, removable 591 ml drip tray

4.3" LCD capacitive touch display

- touchless dispensing
- advanced alerts and self-diagnostics
- on-screen ice machine cleaning and sanitizing instructions
- self-help menu support
- user-selectable language in English, Spanish and French
- component performance data available to servicers for quick and accurate diagnosis
- IoT ready for remote diagnostics to maximize uptime (separate subscription required)

Antimicrobial Shield product protection <sup>3</sup>

- Clean light actively keeps the dispense area clean
- Internal UV light improves cleanliness of water reservoir
- touch free dispensing

Claris ion exchange scale-inhibiting filters factory supplied for optimum performance in most water conditions

- increases length in between cleanings
- improves equipment life
- models with no filter are only available for applications with RO or ion exchange filtration already in place

Installation

- comes fully assembled
- two easy connections – electric and push-in water connection
- drainless design allows dispenser to be placed anywhere a water line can be run and eliminates the cost of a drain installation

4.3" touch display  
with touch free dispensing



### Accessories

SafeCLEAN Plus™ ice machine cleaner

Drip tray drain kit for countertop units

Drip tray drain kit for use with base stand

10.16 cm leg kit for CI - countertop models

15.24 cm leg kit for base stand

Filter cartridge, replacement Claris

Three year remote monitoring subscription and hardware for Open Kitchen

For additional water treatment and other accessories, contact Coast!

## Specification

|                                                                              |                                                                                                                   |
|------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------|
| Ice storage capacity                                                         | 6.8 kg                                                                                                            |
| <b>W1</b> Width                                                              | 37.1 cm                                                                                                           |
| <b>D1</b> Depth                                                              | 56.8 cm                                                                                                           |
| <b>H1</b> Height, countertop models                                          | 57.2 cm                                                                                                           |
| <b>H2</b> Height, with optional base stand                                   | 119.4cm                                                                                                           |
| Height, optional base stand                                                  | 62.2 cm                                                                                                           |
| <b>H3</b> Dispense height clearance                                          | 25.4 cm                                                                                                           |
| Ventilation clearance                                                        | 7.62 cm on each side                                                                                              |
| Service clearance                                                            | 5.08 cm behind and<br>7.62 cm on each side                                                                        |
| <b>C1</b> 115 V/60/1,<br>230 V/50/1 electrical –<br>Includes 8' (2.4 m) cord | 230 V – 2.0 amps<br>Connect to dedicated 15 amp circuit,<br>fuse or breaker.<br><br>10amp plug and lead included. |
| <b>C2</b> Water inlet                                                        | 1/4" push-in                                                                                                      |
| <b>C3</b> Factory equipped external water<br>filter connection               | (2) 1/4" push-in (in and out)<br>(hot water models only)                                                          |
| Air temperature                                                              | 10 - 38 C                                                                                                         |
| Water temperature                                                            | 4 - 32 C                                                                                                          |
| Water pressure                                                               | 10 - 70 psi (69 - 482 kpa)                                                                                        |
| Ice production at 21 C air and 10 C<br>water                                 | 45.4 kg                                                                                                           |
| Ice production at 32 C air and 21 C<br>water                                 | 40.9 kg                                                                                                           |
| Energy efficiency at 32 C air and<br>21 C water                              | 6.21 kWh per 45.4kg of ice                                                                                        |
| Water consumption                                                            | 45.4 L of potable water per<br>45.4 kg of ice                                                                     |
| Refrigerant                                                                  | R290 – 230 V                                                                                                      |
| Approximate net weight/shipping<br>weight – countertop models                | 43.1 kg / 45.4 kg                                                                                                 |
| Approximate net weight/shipping<br>weight – optional base stand              | 10.9 kg / 13.6 kg                                                                                                 |

**NOTE:** Intended for commercial use only. Follett can't guarantee freight carrier's ability to deliver to residential locations. Follett service providers may not be bonded to perform on-site warranty repairs in certain areas.

**NOTE:** For use in applications with greater than 10 mg/l but less than 400 mg/l total dissolved solids in water and less than 100 mg/l hardness (either naturally occurring or treated with reverse osmosis or other hardness reducing technology).  
Not recommended for use with salt softened water.

<sup>1</sup> 118 ml of ice in a 355 ml cup.

<sup>2</sup> Independent third party studies. Contact Follett for details.

<sup>3</sup> In conjunction with recommended cleaning process.

Claris is a registered trademark of the ACLARIS Water Innovations GmbH in Switzerland.

Agion is a registered trademark of Sciescent LLC.


CHAMPION and SAFECLEAN PLUS are trademarks of Follett Products, LLC.

CHEWBLET and FOLLETT are registered trademarks of Follett Products, LLC registered in the US.

Follett reserves the right to change specifications at any time without obligation.

Certifications may vary depending on country of origin.

## Dimensional drawing

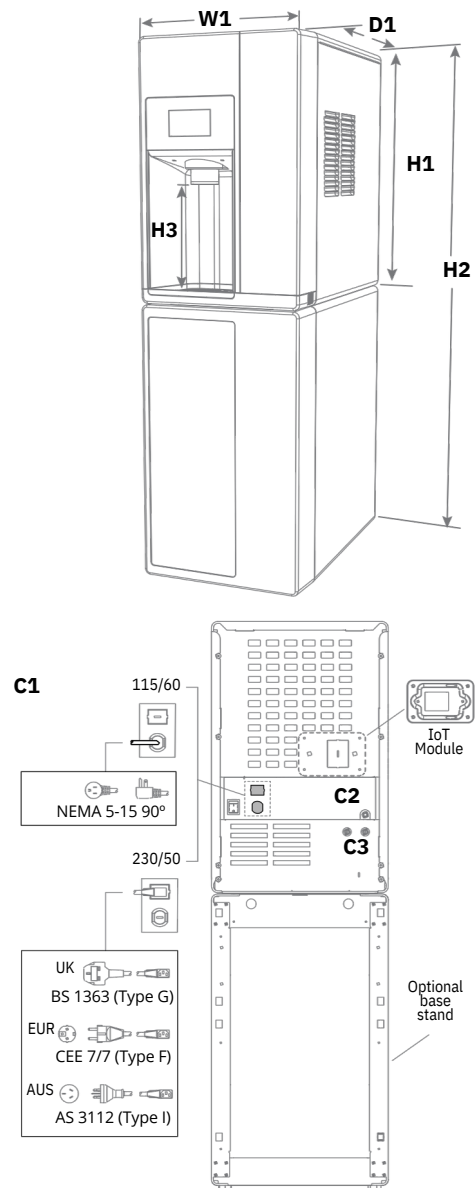

**SHORT FORM SPECIFICATION:** (Choose one) \_\_\_\_\_ ice and water \_\_\_\_\_ or ice-only dispenser to be Follett automatic load in countertop configuration, with 6.8 kg of storage. \_\_\_\_\_ 230 V power. Environmentally responsible R290 (230 V) ice machine to be air-cooled. Ice machine to produce approximately 45.4 kg of Chewblet compressed nugget ice at air temperature of 21 C and water temperature of 10 C. Ice machine to be equipped with printed circuit board and diagnostics including amp trace graph to allow simplified servicing and with capacitive touch user interface and touchless dispensing. Storage area to be insulated with CARB compliant non-HFC foam. 2.4 m cord and plug provided. CE certified (230 V) For use in applications with greater than 10 mg/l but less than 400 mg/l total dissolved solids in water and less than 100 mg/l hardness.

Champion 15 ice and water dispenser