



### Features

Horizon Chewblet ice machine with up to 675 lb (306 kg) daily production of customer preferred Chewblet ice

- automatically transport ice through a tube with RIDE® technology from up to 75' (22.8 m) away
- chewable, compressed nugget ice is preferred over cubes<sup>1</sup>
- Chewblet ice dispenses reliably from ice and beverage dispensers
- available with approximately 1.00" (2.54 cm) long standard Chewblet ice or optional 3/8" (0.95 cm) long Micro Chewblet™ ice
- meets 2018 Department of Energy regulations
- water and energy efficient
- quiet production without noisy harvest cycles

### Durable, attractive ice machine

- regular bearing inspection or replacement is not required
- easy-to-read LED operating status and diagnostic display
- smooth contours for aesthetically appealing appearance

### Designed with sanitation in mind

- Agion® silver-based antimicrobial product protection of key ice and water contact components<sup>2</sup>
- aluminum-bronze evaporator has antimicrobial properties
- automatic self-flushing reduces water scale buildup
- floatless, sealed design inhibits formation of biofilms
- semi-automatic cleaning and sanitizing system

### Certifications



### Warranty

- 3 years parts and labor, 5 years compressor parts

### Short form specification:

Ice machine to be a Follett® Horizon Chewblet ice machine model \_\_\_\_\_ [Insert size/series, condenser type and installation/mounting, from model number guide] self contained 700 □ self contained air-cooled □ self contained water-cooled capable of producing compressed nugget ice using an efficient, sanitary horizontal evaporator/auger system and delivering ice by a flexible wire reinforced transport tube to □ ice storage bin, □ ice and water dispenser, □ ice and beverage dispenser, □ drop-in dispenser and provided with a stainless steel frame and exterior, slide-out compressor/condenser with utility docking station, front-mounted unit status display, automatic self-flush, and semi-automatic cleaning and sanitizing system, plus all the features listed:

Horizon self-contained 700 series ice machine					
For use with <sup>1</sup>	Install/mount	Condenser	V/Hz/Ph	Item number	
ice storage bin	top mount	air	115/60/1	HCD700ABT	
			208-230/60/1	HCC700ABT	
			230/50/1	HCE700ABT	
	RIDE	water	115/60/1	HCD700WBT	
			208-230/60/1	HCC700WBT	
			230/50/1	HCE700WBT	
	Follett Vision™ undercounter ice & beverage dispenser	RIDE	air	115/60/1	HCD700ABS
				208-230/60/1	HCC700ABS
				230/50/1	HCE700ABS
water		115/60/1	HCD700WBS		
		208-230/60/1	HCC700WBS		
		230/50/1	HCE700WBS		
Cornelius PR150 undercounter ice & beverage dispenser <sup>2</sup>	RIDE	air	115/60/1	HCD700AVS	
			208-230/60/1	HCC700AVS	
			230/50/1	HCE700AVS	
	water	115/60/1	HCD700WVS		
		208-230/60/1	HCC700WVS		
		230/50/1	HCE700WVS		
countertop ice a& beverage dispenser (by others)	top mount <sup>3</sup>	air	115/60/1	HCD700AHT	
			208-230/60/1	HCC700AHT	
			230/50/1	HCE700AHT	
		water	115/60/1	HCD700WHT	
			208-230/60/1	HCC700WHT	
			230/50/1	HCE700WHT	
	RIDE	air	115/60/1	HCD700AHS	
			208-230/60/1	HCC700AHS	
			230/50/1	HCE700AHS	
		water	115/60/1	HCD700WHS	
			208-230/60/1	HCC700WHS	
			230/50/1	HCE700WHS	
drop-in dispenser (by others)	RIDE	air	115/60/1	HCD700AJS	
			208-230/60/1	HCC700AJS	
			230/50/1	HCE700AJS	
	water	115/60/1	HCD700WJS		
		208-230/60/1	HCC700WJS		
		230/50/1	HCE700WJS		

<sup>1</sup> Ordered separately

<sup>2</sup> Not compatible with Micro Chewblet ice

<sup>3</sup> Requires Harmony™ top kit (see page 4)

NOTE: For Micro Chewblet ice, replace second character (C) with an M e.g. HMD700ABT

<sup>1</sup> Independent third party studies. Contact Follett for details.

<sup>2</sup> Disclaimer: Antimicrobial protection is limited to the treated components and does not treat water or ice.

## Accessories

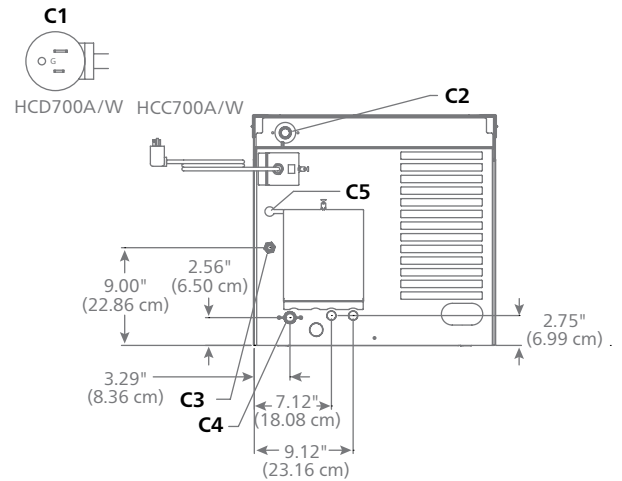
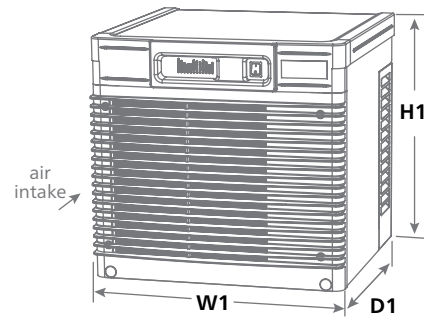
- Harmony conversion top kit for ice and beverage dispensers (listed on page 4)
- Water filters (refer to form# 9905)
- Wall mount bracket (item# 00997098)
- Ice machine stand, height-adjustable (item# 00997080)
- Timer to control one or two Horizon ice machines (item# 00967265)
- Longer ice transport tube (10' / 3 m provided as standard for RIDE models) – Specify length: \_\_\_\_ ft/m in 5' / 1.5 m increments
- SafeCLEAN Plus™ ice machine cleaner (item# 01050863)

## Specification

<b>W1</b> Width	22.70" (57.7 cm) Fits on 22.00" wide dispensers
<b>D1</b> Depth	24.25" (61.6 cm)
<b>H1</b> Height	21.25" (54.0 cm)
Ventilation clearance air-cooled models only	top mount – 1.00" (2.54 cm) RIDE – See page 5-6 for details
<b>C1</b> Electrical 115 V/60/1 – HCD700 models	6.5 amps, requires dedicated 15 amp circuit, 6.5' (2 m) cord, NEMA 5-15 plug
<b>C2</b> Electrical 208-230 V/60/1 – HCC700 models	7.0 amps, requires dedicated 15 amp circuit, 6.5' (2 m) cord, NEMA 6-15 plug
<b>C3</b> Electrical 230 V/50/1 – HCE700 models	7.0 amps, requires dedicated 15 amp circuit, 6.5' (2 m) cord only. Separate circuits required for each ice machine.
<b>C4</b> Ice transport tube	see page 7 for details
<b>C5</b> Water inlet	3/8" OD push-in water inlet
<b>C6</b> Drain	3/4" MPT, vented T required
<b>C7</b> Ice bin signal cord	for Vision applications only
Water-cooled ice machine connections	<b>C8</b> – 1/4" FPT condenser inlet <b>C9</b> – 1/4" FPT condenser outlet
Air temperature	50 - 100 F (10 - 38 C)
Water temperature	45 - 90 F (7 - 32 C)
Potable water pressure	10 - 70 psi (69 - 483 kPa)
Condenser water pressure	30 - 150 psi (207-1034 kPa)
Ice production	see ice production charts on page 8
Energy consumption 90 F (32 C) air, 70 F (21 C) water	air-cooled models – 5.2 kWh water-cooled models – 3.9 kWh per 100 lb (45.4 kg) ice
Heat rejection - HCC & HCD models	air-cooled models – 8,850 BTU/hr, water-cooled models – 10,150 BTU/hr to water
Heat rejection - HCE models	air-cooled models – 6,200 BTU/hr water-cooled models – 7,110 BTU/hr to water
Water consumption	12 gal (45.4 L) of potable water per 100 lb (45.4 kg) of ice (per AHRI test standards). 12.5 gal (47.3 L) including periodic flushing.
Water flow requirement for water-cooled models	140 gallons/100 lb of ice (530 L/45.4 kg), 0.5 gallons per minute
Approximate ship weight	190 lb (86.2 kg)


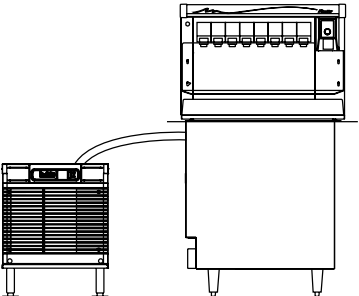

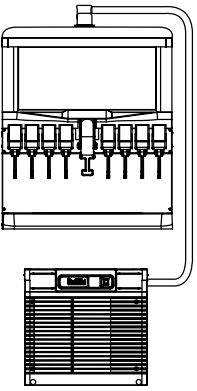
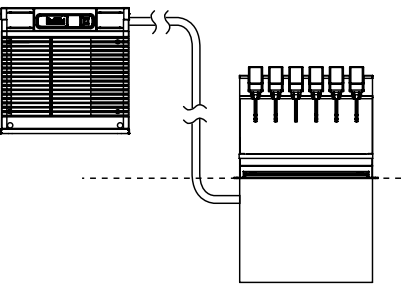

NOTE: For indoor use only

## Dimensional drawing



# 1 – Locating the ice machine

Horizon self-contained Chewblet ice machines allow top-mounting or mounting in a base cabinet, on a wall or on a floor stand up to 75' (22.8 m) from the dispenser or ice bin with RIDE technology. In-cabinet mounting (RIDE applications) require special attention to service access, unit ventilation and ice tube runs (see pages 4-7).

<p><b>Top mounting – ice and beverage dispensers (by others)</b></p>	<p><b>RIDE model – Follett low-profile Vision and Cornelius PR150 ice and beverage dispensers</b></p>	<p><b>Top mount on Follett ice storage bins</b></p>
		
<p><b>Important specifier notes:</b></p> <ol style="list-style-type: none"> <li>1. Dispenser must be compatible with nugget ice. See page 4 for compatible ice and beverage dispenser models and top kit numbers.</li> <li>2. Verify ceiling or soffit height to ensure sufficient top clearance.</li> </ol>	<p><b>Important specifier notes:</b></p> <ol style="list-style-type: none"> <li>1. See pages 4-6 for critical clearance and venting requirements.</li> <li>2. Ice transport tube ships with Vision ice and beverage dispenser (Vision applications only).</li> <li>3. Ice transport tube ships with Horizon series ice machine for Cornelius dispensers.</li> </ol>	<p><b>Important specifier notes:</b></p> <ol style="list-style-type: none"> <li>1. See form# B300 for bin sizing.</li> <li>2. Verify ceiling or soffit height to ensure top clearance.</li> <li>3. Locate floor sink or grate and drains in front of storage bin.</li> <li>4. Do not position bin drain lines to block Ice•Device™ bin cart.</li> </ol>
<p><b>RIDE model – ice and beverage dispensers (by others)</b></p>	<p><b>RIDE model – drop-in beverage dispensers (by others)</b></p>	<p><b>RIDE model – Follett ice storage bins</b></p>
		
<p><b>Important specifier notes:</b></p> <ol style="list-style-type: none"> <li>1. See pages 4-6 for critical clearance and venting requirements.</li> <li>2. Dispenser must be compatible with nugget ice. Compatible dispensers include Servend MD150/175/200/250, SV175/200/250, MDH-402, and Follett Symphony Plus™ 110CM as well as the dispensers listed on page 4.</li> <li>3. Top kit MSF30SC required with Coca-Cola Freestyle 7000. Top adapter 46412 and ice kit 46430 must also be ordered from Coca-Cola. Consult with Coca-Cola and Follett to qualify application prior to ordering.</li> <li>4. RIDE application is approved only for Pepsi Spire 3.0 and 5.0 designed for top mount ice machines and requires MSP24SC for 3.0 and MSP30SC for 5.0, ordered separately. For manual fill versions of Pepsi Spire 3.0 and 5.0, contact factory.</li> </ol>	<p><b>Important specifier notes:</b></p> <ol style="list-style-type: none"> <li>1. See pages 4-6 for critical clearance and venting requirements.</li> <li>2. Compatible with the following dispensers: Cornelius 1522, 1722, 2323 and Lancer 2200, 2300, 23300.</li> <li>3. Requires 12.00" (30.5 cm) of access space for installation on transport tube side.</li> </ol>	<p><b>Important specifier notes:</b></p> <ol style="list-style-type: none"> <li>1. See form# B300 for bin sizing.</li> <li>2. Locate floor sink or grate and drains in front of storage bin.</li> <li>3. Do not position bin drain lines to block Ice•Device bin cart.</li> </ol>

## 1 – Locating the ice machine (continued)

Top mounting – compatible ice and beverage dispensers <sup>1</sup>					
Manufacturer	Model Number	Width in (cm)	Depth <sup>2</sup> in (cm)	Height <sup>3</sup> in (cm)	Harmony top kit
Coca-Cola dispensers	Freestyle 7000	30.10 ( 76.5)	33.11 ( 79.0)	47.00 (119.4)	HTF30SC-7F <sup>4,5</sup>
	Freestyle 9000	25.50 ( 64.8)	35.50 ( 90.2)	73.75 (187.3)	HTF24SC-7F <sup>4,6</sup>
Cornelius dispensers	DB/ED/DF 150 series	22.00 ( 55.9)	30.75 ( 78.1)	35.63 ( 90.5)	HTC22SC-7F
	DB/ED/DF 175 series	24.50 ( 62.2)	30.00 ( 76.2)	35.63 ( 90.5)	HTC24SC-7F
	DB/ED/DF 200 series	30.00 ( 76.2)	30.95 ( 78.6)	35.63 ( 90.5)	HTC30SC-7F
	DB/ED/DF 250 series	30.00 ( 76.2)	30.95 ( 78.6)	39.63 (100.7)	HTC30SC-7F
	DB/ED/DF 300 series	44.38 (112.7)	30.00 ( 76.2)	39.63 (100.7)	HTC44SC-7 (F or B) <sup>7</sup>
	FlavorFusion / Overload	30.00 ( 76.2)	33.00 ( 83.8)	41.00 (104.1)	HTC30SC-7F-FF
	IDC215	30.00 ( 76.2)	29.88 ( 75.9)	36.69 ( 93.2)	HTC30SC-7F-IDC
	IDC255 and Pro Fast Gate	30.00 ( 76.2)	33.13 ( 84.2)	39.75 (101.0)	HTC30SC-7F-IDC <sup>8</sup>
Lancer dispensers	4500-22N	22.00 ( 55.9)	30.50 ( 77.5)	36.66 ( 93.1)	HTL22SC-7F
	4500-30N	30.00 ( 76.2)	30.50 ( 77.5)	36.66 ( 93.1)	HTL30SC-7F
	FS-22N	22.00 ( 55.9)	30.50 ( 77.5)	41.28 (104.8)	HTL22SC-7F
	FS-30N	30.00 ( 76.2)	30.50 ( 77.5)	41.28 (104.8)	HTL30SC-7F
	FS-44N	44.75 (114.0)	30.38 ( 77.2)	42.72 (108.5)	HTL22SC-7F <sup>9</sup>
	Sensation 30"	30.00 ( 76.2)	31.00 ( 78.7)	38.25 ( 97.2)	HTL30SC-7F-STP
	Touchpoint	32.50 ( 82.6)	33.70 ( 85.6)	40.00 (101.6)	HTL30SC-7F-STP
Pepsi dispensers	Spire 3.0	27.00 ( 68.6)	35.00 ( 88.9)	38.12 ( 96.8)	HTP24SC-7F
	Spire 5.0	30.50 ( 77.5)	36.00 ( 91.4)	42.75 (108.6)	HTP30SC-7F
Servend dispensers	MDH-302	42.75 (108.6)	30.50 ( 77.5)	35.16 ( 89.3)	HTS44SC-7 (F or B) <sup>7</sup>

<sup>1</sup> All approved dispensers can be filled with a RIDE model Horizon ice machine without a top kit except Coca-Cola Freestyle 7000 and Pepsi Spire 3.0 and 5.0, see page 3 for details.

<sup>2</sup> Requires minimum 1.00" (2.54 cm) clearance between back of dispenser and wall.

<sup>3</sup> Net height after installation of top kit (excluding height of ice machine).

<sup>4</sup> Consult with Coca-Cola and Follett to qualify application prior to ordering.

<sup>5</sup> Top adapter 46412 and ice kit 46430 must also be ordered from Coca-Cola.

<sup>6</sup> Adapter must also be ordered from Coca-Cola. KO IC Code: 46010 (Silver), 46011 (Red) or 46012 (Black).

<sup>7</sup> Specify "F" for front facing, or "B" for backward facing units.

<sup>8</sup> Contact factory regarding IDC Pro.

<sup>9</sup> FS-44N consists of 2 separate 22.00" (55.9 cm) dispensers. A top kit is needed for each Horizon ice machine ordered.

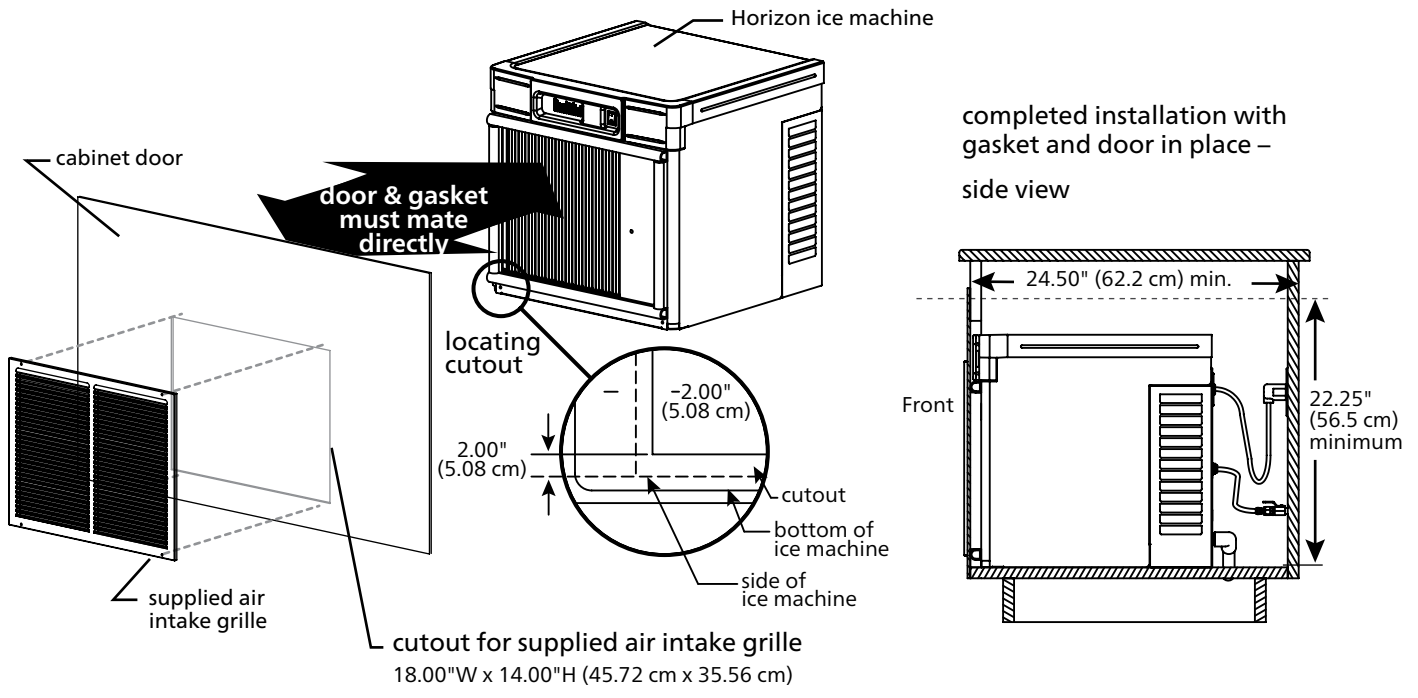
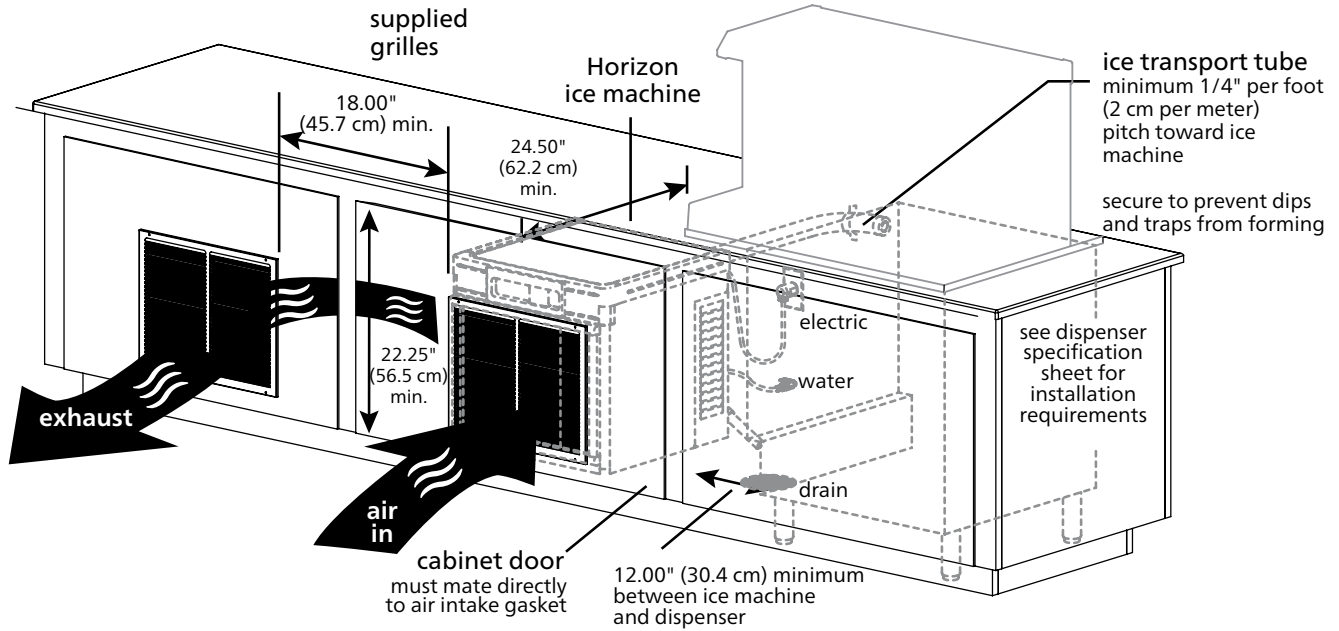
## 2 – Undercounter/in-cabinet mounting

Cabinet details	
<p><b>Important specifier notes</b></p> <ol style="list-style-type: none"> <li>1. Cabinet door opening must meet minimum size requirements shown and be free of obstructions to allow ice machine to slide out (no lip or utilities to block removal).</li> <li>2. Cabinet base must be capable of supporting ice machine and allow ice machine to rest flat on cabinet bottom.</li> <li>3. No counter supports, electric or plumbing can run in front of the ice machine.</li> </ol>	<p><b>Cabinet door opening</b> 24.00"W x 22.25"H (60.9 cm x 56.5 cm) minimum</p> <p><b>slides out</b></p> <p><b>Cabinet base</b> must be flat and free of obstructions (no lip or utilities to block removal)</p>

### 3 – Undercounter/in-cabinet mounting and ventilation

#### Using Follett supplied grilles

Horizon ice machines can be installed undercounter/in-cabinet to fill bins or dispensers using RIDE technology. Care must be taken to ensure proper cabinet venting to avoid recirculation of hot air. Improper venting can cause ice machine outages.



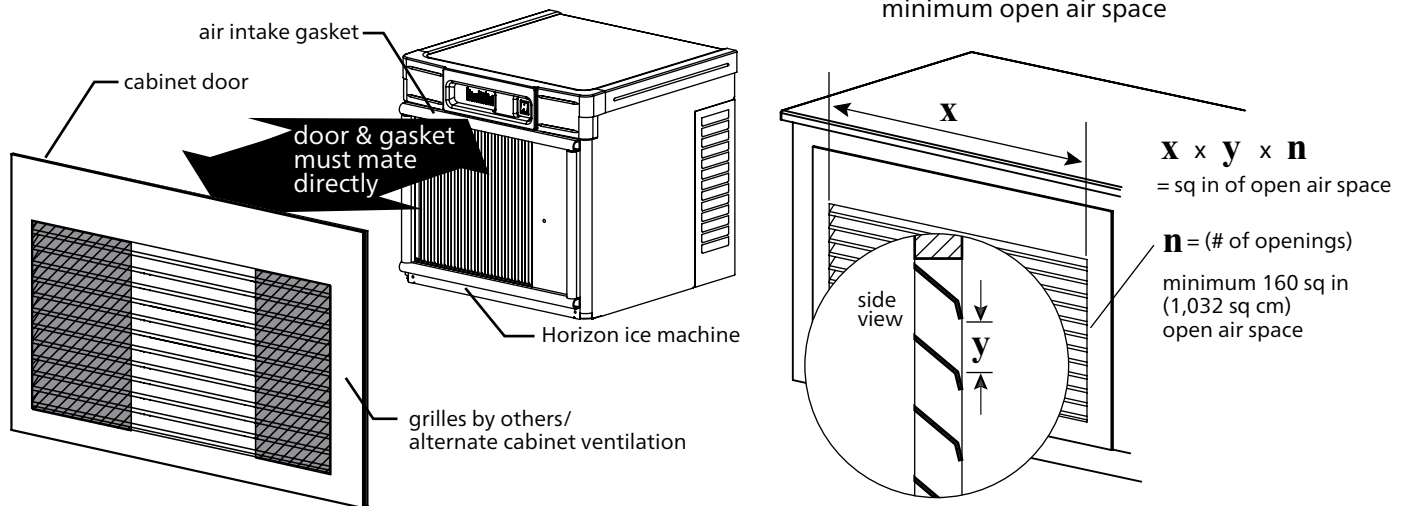
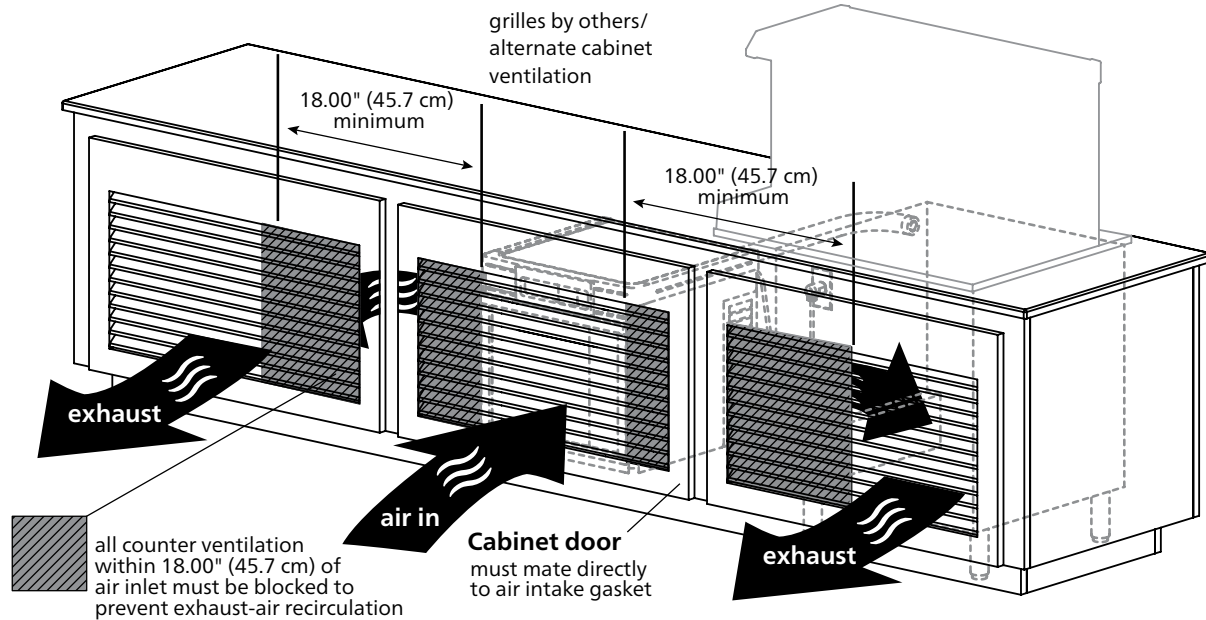
#### Important specifier notes for using Follett supplied grilles:

1. The supplied exhaust grille must be located at least 18.00" (45.7 cm) from the supplied air intake grille (exhaust air must not recirculate with intake air).
2. Cabinet interior must be open to allow for unrestricted exhaust air flow.
3. Ice transport tube needs minimum 1/4" per foot (2 cm per meter) pitch toward ice machine and should be secured to prevent dips and traps from forming.
4. Cabinet door must mate directly to air intake gasket.
5. Cabinet interior must provide a minimum clear space of 24.50" deep (62.2 cm) by 22.25" high (56.5 cm).
6. Cutout for supplied grilles must meet minimum size requirements shown above.
7. Utilities should be conveniently located as shown.

### 3 – Undercounter/in-cabinet mounting and ventilation (continued)

#### Using grilles by others/alternate cabinet ventilation

Cabinets with ventilation or louvers other than those provided require special consideration to provide proper ventilation. Recirculation of hot air will reduce ice machine performance and can cause ice machine outages.

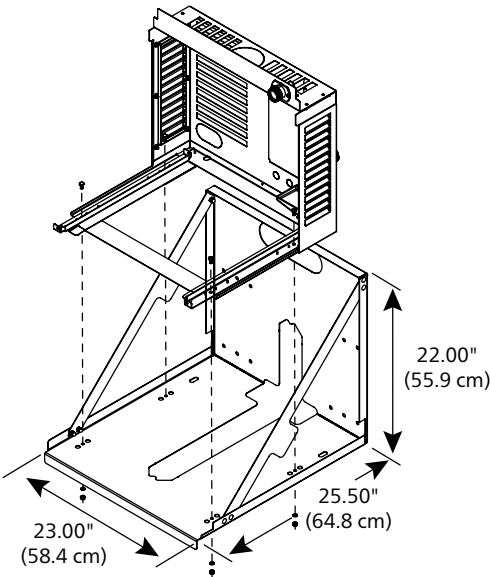
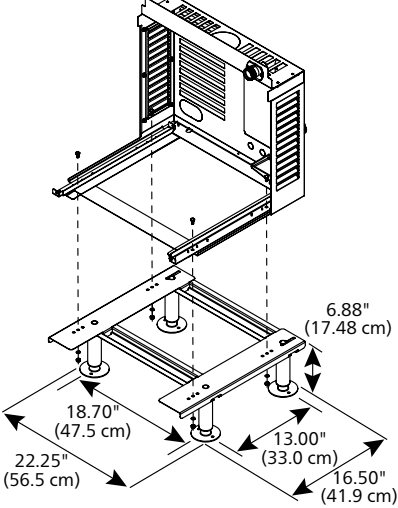


#### Important specifier notes for using grilles supplied by others/alternate cabinet ventilation:

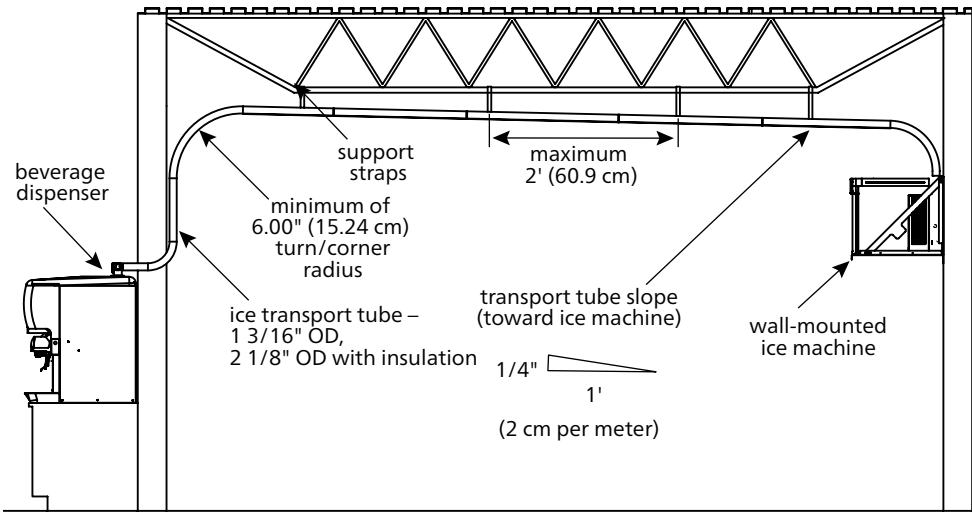
1. Exhaust must be at least 18.00" (45.7 cm) from air intake (exhaust air must not recirculate with intake air).
2. Cabinet interior must be open to allow for unrestricted exhaust air flow.
3. Ice transport tube needs minimum 1/4" per foot (2 cm per meter) pitch toward ice machine and should be secured to prevent dips and traps from forming.
4. Ducting must be provided if cabinet door does not mate directly to air intake gasket.
5. Cabinet interior must provide a minimum clear space of 24.50" deep (62.2 cm) by 22.25" high (56.5 cm).
6. Grilles by others must meet minimum requirements for open air space shown above.
7. Utilities should be conveniently located as shown.



## 4 – Horizon ice machine mounting accessories

Optional wall mount bracket	Optional machine stand	Important specifier notes:
 <p>23.00" (58.4 cm) 25.50" (64.8 cm) 22.00" (55.9 cm)</p>	 <p>18.70" (47.5 cm) 22.25" (56.5 cm) 13.00" (33.0 cm) 16.50" (41.9 cm) 6.88" (17.48 cm)</p>	<p><b>Important specifier notes:</b></p> <ol style="list-style-type: none"> <li>1. For secure wall mounting, specify optional wall mount bracket.</li> <li>2. Wall and fasteners must support the weight of the ice machine, bracket, supply water and ice. Use of a backing board may be required with hollow wall construction.</li> <li>3. Machine stand mounting adds 6.88" (17.48 cm) to height of ice machine.</li> <li>4. No dips in tube routing allowed.</li> <li>5. Ice transport tube needs minimum 1/4" per foot (2 cm per meter) pitch toward ice machine and should be secured to prevent dips and traps from forming.</li> </ol>

## 5 – Horizon ice tube runs - specifier guidelines

Long tube runs for RIDE remote ice delivery equipment	Important specifier notes:
 <p>beverage dispenser support straps minimum of 6.00" (15.24 cm) turn/corner radius ice transport tube – 1 3/16" OD, 2 1/8" OD with insulation transport tube slope (toward ice machine) 1/4" / 1' (2 cm per meter) maximum 2' (60.9 cm) wall-mounted ice machine</p>	<p><b>Important specifier notes:</b></p> <ol style="list-style-type: none"> <li>1. 75' (22.8 m) maximum ice transport tube run.</li> <li>2. Tubing routing bends must have a 6.00" (15.24 cm) radius or larger.</li> <li>3. Dips and traps are not allowed. If not supported from underneath, secure insulated ice transport tube at least every 2' (60.9 cm) to prevent drips and traps.</li> <li>4. Relative humidity levels above 80% in areas where the ice machine or ice transport tube is located may produce excessive condensation that will cause water damage.</li> <li>5. Contact factory for recommendations on running tubing through a decorative soffit or chase.</li> </ol>

### Ice production – Horizon 700 series, air-cooled 60 Hz

Inlet water temperature F (C)	Ambient air temperature F (C)					lb/kg production in 24 hr
	60 (16)	70 (21)	80 (27)	90 (32)	100 (38)	
50 (10)	740 (336)	675 (306)	644 (292)	586 (266)	565 (256)	
60 (16)	714 (324)	673 (305)	618 (280)	559 (254)	529 (240)	
70 (21)	651 (295)	643 (292)	589 (267)	525 (238)	512 (232)	
80 (27)	649 (294)	609 (276)	561 (254)	506 (230)	478 (217)	
90 (32)	600 (272)	583 (264)	519 (235)	499 (226)	441 (200)	

### Ice production – Horizon 700 series, water-cooled 60 Hz

Inlet water temperature F (C)	Condenser water temperature F (C)				lb/kg production in 24 hr
	60 (16)	70 (21)	80 (27)	90 (32)	
50 (10)	672 (305)	665 (302)	660 (299)	656 (298)	
60 (16)	600 (272)	597 (271)	584 (265)	582 (264)	
70 (21)	544 (247)	541 (245)	539 (244)	535 (243)	
80 (27)	521 (236)	515 (234)	506 (230)	504 (229)	
90 (32)	506 (230)	504 (229)	501 (227)	500 (227)	

### Ice production – Horizon 700 series, air-cooled 50 Hz

Inlet water temperature F (C)	Ambient air temperature F (C)					lb/kg production in 24 hr
	60 (16)	70 (21)	80 (27)	90 (32)	100 (38)	
50 (10)	651 (295)	600 (272)	571 (259)	518 (235)	460 (209)	
60 (16)	620 (281)	574 (260)	531 (241)	492 (223)	443 (201)	
70 (21)	572 (260)	538 (244)	506 (229)	479 (217)	416 (189)	
80 (27)	569 (258)	519 (235)	493 (224)	452 (205)	415 (188)	
90 (32)	537 (244)	504 (229)	471 (214)	430 (195)	389 (177)	

### Ice production – Horizon 700 series, water-cooled 50 Hz

Inlet water temperature F (C)	Condenser water temperature F (C)				lb/kg production in 24 hr
	60 (16)	70 (21)	80 (27)	90 (32)	
50 (10)	608 (276)	600 (272)	592 (269)	583 (265)	
60 (16)	578 (262)	571 (259)	567 (257)	548 (249)	
70 (21)	556 (251)	540 (245)	537 (244)	528 (239)	
80 (27)	530 (241)	521 (236)	514 (233)	489 (222)	
90 (32)	515 (233)	512 (232)	508 (230)	484 (219)	



Agion is a registered trademark of Sciescent LLC.  
 Harmony, Horizon, Ice•Device, Micro Chewblet, SafeCLEAN Plus, Symphony Plus, and Vision are trademarks of Follett LLC.  
 Chewblet, Follett and RIDE are registered trademarks of Follett LLC, registered in the US.  
 Follett reserves the right to change specifications at any time without obligation. Certifications may vary depending on country of origin.

### Self-contained 700 series ice machine