





Features

- · WITH PUMP OUT DRAIN
- · Maximum drain height 1 metre.
- · Maximum drain length 4 metres.
- 2 metres of drain hose included in installation kit.
- · Produces clear, long-lasting gourmet cubes.
- · Space-saving 463 mm wide under-counter design.
- Produces up to 58 kg of ice per day.
- · Castors optional bringing height down to 839mm
- Constructed from sturdy, corrosion-resistant stainless steel and fingerprint-proof plastic.
- · Ideal for any under-counter or bar application.
- · Contemporary, elegant design.
- · Environmentally friendly R134A refrigerant.
- · Easily adjust the thickness of your ice from the front of the machine!

Space-Saving Solutions

- · Front air discharge design for compact spaces.
- · Low profile top saves counter space.
- · Stores up to 22 kg of ice.
- · Easy front access to ice.
- · Removable Air Filter.

Options & Accessories

WATER FILTERS					
Ice Machine	Manifold				
Model	System	Replacement			
UCG135APD	СD10В	СD100В			

Ice Maker Warranty

Every Ice-O-Matic ice maker is backed by a warranty that provides both parts and labor coverage.


· Two years Parts and Labour

Ice Form



GOURMET ICE

GOURMET ICE DI	IMENSIONS
Height	30.5 mm
Diameter	34.25 mm
















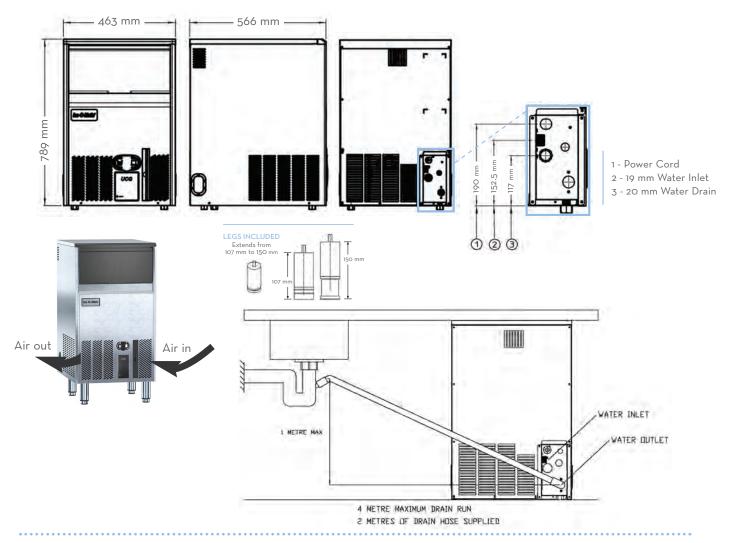

Operating Requirements

	MINIMUM	MAXIMUM	
	50 Hz		
Ambient Temp. Range Air	10°C	43°C	
Water Temp.	5°C 38°C		
Water Pressure	1 BAR	5 BAR	
Electrical Voltage	230V/50Hz/1ph		

Dimensions

ALL MODELS				
W x D x H (mm)	463 x 566 x 896-939 on legs			
839mm high on castors				

Specifications

		Ice Production per 24hrs	Ice Production per 24hrs	Ice Production per 24hrs			kWH Used	
Model Number	Cond. Unit	21°C air/10°C water (kg)	32°C air/21°C water (kg)	10°C air/10°C water (kg)	Storage Capacity (kg)	Water Consumption (ltr/hr)	per 45 kg of	Voltage Characteristics
UCG135APD	Air	58	47	57	22	6	9	230/50/1

NOTES:

Approx. Shipping Weight (kg): UCG135APD (37)

R134A

All specifications and performance data are subject to normal manufacturing variances.

Ice-O-Matic reserves the right to change the specifications at any time without obligation. Certifications may vary depending on country of origin.