UCF165A - FLAKE SERIES - UNDERCOUNTER

COAST ICE & COLD SOLUTIONS



Features

- Flake Ice Maker producing fast cooling, energy efficient ice.
- Space-saving 535mm wide undercounter design.
- Produces up to 80 kgs of ice per day.
- Built-in storage bin stores up to 25 kgs.
- Constructed from sturdy, corrosion-resistant stainless steel and fingerprint-proof plastic.
- Ideal for any undercounter or bar application.
- Contemporary, elegant design.

Space-Saving Solutions

- Front air discharge design for compact spaces.
- · Low profile top saves counter space.
- Stores up to 25 kgs of ice.
- Easy front access to ice.
- Castors optional bringing height down to 850mm.

Options & Accessories

WATER FILTERS						
Ice Machine	Manifold					
Model	System	Replacement				
UCF165A	CD10B	СD100В				

Ice Form



FLAKED ICE

Ice Maker Warranty

Every Ice-O-Matic ice maker is backed by a warranty that provides both parts and labor coverage.


• Two years Parts and Labor





COAST ICE & COLD SOLUTIONS



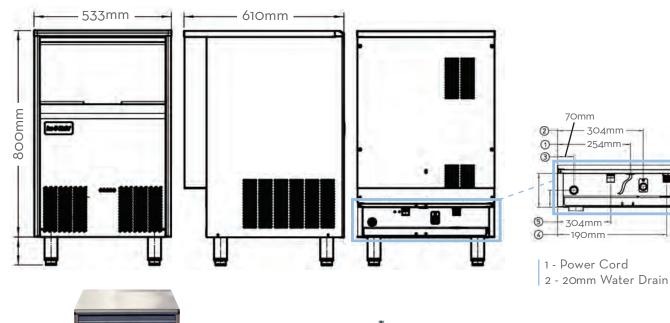





LEGS INCLUDED

UCF165 - Extends from 90mm to 136mm

Operating Requirements

	MINIMUM	MAXIMUM		
	50 Hz			
Ambient Temp. Range Air	10°C	40°C		
Water Temp.	5°C	35°C		
Water Pressure	1 BAR	5 BAR		
Electrical Voltage	230/50/1			

Dimensions

ALL MODELS				
W x D x H (mm)	535 x 626 x 936 on legs			
850mm high with castors				

Specifications

	Ice Production per 24hr				kWH Used per 45 kg of ice @			
Model Number	Cond. Unit	10°C air/ 10°C water (kg)	21°C air / 10°C water (kg)	32°C air/ 21C water (kg)	Storage Capacity kg			Voltage Characteristics
UCF165A	Air	82	80	63	25	2.2	2.65	230/50/1

NOTES: Approx. Shipping Weight: 60kg

Refrigerant Type: R134A

All specifications and performance data are subject to normal manufacturing variances.

Ice-O-Matic reserves the right to change the specifications at any time without obligation. Certifications may vary depending on country of origin.

Coast Distributors Pty Ltd PO Box 288, Unanderra NSW 2526 Ph: (02) 9524 1234 E: sales@coastdistributors.com.au www.coastdistributors.com.au